











- Profilo in alluminio con copertura opale
- Led 21,6W/mt
- Tappi in plastica grigia
- Alimentatore integrato

- Aluminium profile with opal covering
- 21.6 W/m LED
- Grey plastic caps
- Integrated power supply unit

- Aluminiumprofil mit opalweißer Abdeckung
- LED 21,6W/m
- Stopfen aus grauem Kunststoff
- Integriertes Netzteil

- Perfil de aluminio con cobertura ópalo
- Led 21,6W/m
- Tapones de plástico gris
- Fuente de alimentación incorporada

- Алюминиевый профиль с опаловым покрытием
- Светодиод 21,6 Вт/м
- Заглушки из серого пластика
- Интегрированный блок питания

Omologazioni

CE IP40

Type-approvals

CE IP40

Zulassungen

CE IP40

Homologaciones

CE IP40

Омологации

CE IP40

T311.10

- 1 mt
- 21,6W
- 24V
- 3000°K
- 3015Lumen

T311.10.D



- * - Dimmerabile - Dimmable
- Dimmerfähig - Intensidad regulable
- С регулируемой яркостью
- 1 mt
- 21,6W
- 24V
- 3000°K
- 3015Lumen

T311.11

- 2 mt
- 43,2W
- 24V
- 3000°K
- 6030Lumen

T311.11.D

- * - Dimmerabile - Dimmable
- Dimmerfähig - Intensidad regulable
- С регулируемой яркостью
- 2 mt
- 43,2W
- 24V
- 3000°K
- 6030Lumen

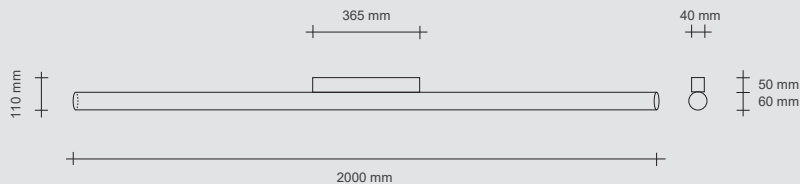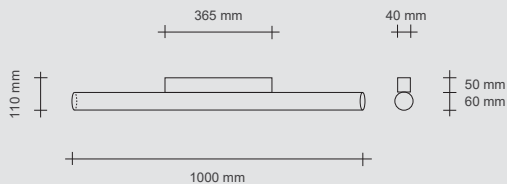

- * - Dimmerabile con PUSH0-10V/1-10VDali/Pulsante normalmente aperto
- Dimmable with PUSH0-10V/1-10VDali/Normally open button
- Dimmerbar mit PUSH0-10V/1-10VDali/Taste normalerweise offen
- Intensidad luminosa no regulable con PUSH0-10V/1-10VDali/Pulsador normalmente abierto
- Диммируется с помощью технологий PUSH 0-10V/1-10B Dali/Нормально разомкнутый контакт



www.sforzinilluminazione.com

Also available in customised form.

Subject to changes

FW Lighting

The Lighthouse - 37 Wadham Grove - Emersons Green - Bristol - BS1 6 7DX
info@fw.lighting.com www.fw.lighting.com Tel:07891 919 169

