



NEW STYLE ALLUMIA KNX CONTROL DEVICES

PA refers to the front plate type only.

System 44 is a modular system providing multiple options of control, style and finish. You will need to specify the mounting frame, touch control and front plate + any other features that are required when ordering.

ALLUMIA (Aluminium) Touch is born from a sophisticated union between technology and design.

During the night you can always identify the light command thanks to its delicate LED light. these plates are elegant pieces of contemporary furniture.

AVE offers a range of automation products aimed at the hotel and residential home using proprietary protocols (described in the technical catalogue) plus KNX protocol

Electronic multi-touch control - mono stable output-relay multiple points NO-contact 2A 230V~ Dry contact - controlled by touching the frontal area of the finishing plate or from multiple points with NO push buttons - mono stable, bi stable or timed operating modalities, curtains with interlock with low consumption for identification in the darkness

Home and hotel automation devices with multi-touch configurable commands to control lighting, shutter and recall scenarios. Visual and acoustic feedback command and viewing the status of the actuator: Light on / off, Shutter Open/ Close/ Move, etc. It is possible to select the sensitivity of a device at the touch of the plate or, 4mm distance from it. Powered by Home automation power supply.





444KNXT2B
 Toggle control device KNX compatible with 2 channels - toggle white colour
 - supplied with no. 1 plastic white ring - 1 module

444KNXT2B



444KNXT2CR
 Toggle control device KNX compatible with 2 channels - toggle white chrome
 - supplied with no. 1 plastic chrome ring - 1 module

444KNXT2CR




444KNXT20T
 Toggle control device KNX compatible with 2 channels - brass toggle - supplied with
 no. 1 brass ring - 1 module

444KNXT20T


Functions

	Switch	Dimmer	Scene	Shutter and Blinds	Send Value	Control Value	Multi-action (3+3 LongP.)
Commands	On/Off	Increase/Decrease	1 - 64	Up + Stop	Send Value n.1	Unforced + Off	On/Off
	On	Increase	Save Scene	Down + Stop	Send Value n.2	Unforced + On	Up/Down
	Off	Decrease		Up/Down + Stop	Send Value n.3	Forced + Off	Scene
				Up	Send Value n.4	Forced + On	Send Value (0-255)
				Down	Send Value n.1 (long. P.)		Send Value (0-100%)
				Up/Down	Send Value n.2 (long. P.)		HVAC
				Stop	Send Value n.3 (long. P.)		
				Open/Closed Slats	Send Value n.4 (long. P.)		
				Open Slats			
				Closed Slats			

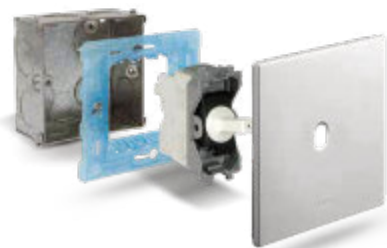

■ **44PANT21ALS**

Alluminio naturale spazzolato
Natural brushed aluminium




44PANT21ALS



Mounting support to be used with 2x
442TC13Rblank insert
44A02

■ **44PANT21ANS**

Alluminio antracite spazzolato
Anthracite brushed aluminium



44PANT22ANS



Mounting support required to fit UK
back box
44A02

■ **44PANT22ALS**


Alluminio naturale spazzolato
Natural brushed aluminium

■ **44PANT22ANS**

Alluminio antracite spazzolato
Anthracite brushed aluminium

■ **44PAN01ALS**

Alluminio naturale spazzolato
Natural brushed aluminium



44PAN01ALS




Mounting support to be used with 4x
442TC13Rblank insert
44A03

■ **44PAN01ANS**

Alluminio antracite spazzolato
Anthracite brushed aluminium

■ **44PAN02ALS**

Alluminio naturale spazzolato
Natural brushed aluminium



44PAN02ANS




Mounting support to be used with 2x
442TC13Rblank insert
44A03

■ **44PAN02ANS**

Alluminio antracite spazzolato
Anthracite brushed aluminium

■ **44PAN03ALS**

Alluminio naturale spazzolato
Natural brushed aluminium



44PAN03ALS




Mounting support required
to fit UKback box
44A03

■ **44PAN03ANS**

Alluminio antracite spazzolato
Anthracite brushed aluminium

■ **44PAN04ALS**

Alluminio naturale spazzolato
Natural brushed aluminium



44PAN04ANS



Mounting support required
to fit UKback box
44A04

■ **44PAN04ANS**

Alluminio antracite spazzolato
Anthracite brushed aluminium