



ave bus

domina smart
Management Hotel SystemIoT

a **DOMINA** plus
ave Home automation system for class A

KNX

DALI

CRESTRON

Modbus

works with the
Google Assistant

ANDROID APP ON
Google play

Available on the
App Store

JUST ASK
alexa

NEW STYLE TOGGLE SWITCH KNX CONTROL DEVICES

PV refers to the front plate type only.

System 44 is a modular system providing multiple options of control, style and finish. You will need to specify the mounting frame, touch control and front plate + any other features that are required when ordering.

NEW STYLE Touch is born from a sophisticated union between glass, technology and design.

During the night you can always identify the light command thanks to its delicate LED light. These plates are elegant pieces of contemporary furniture.

AVE offers a range of automation products aimed at the hotel and residential home using proprietary protocols (described in the technical catalogue) plus KNX protocol

Electronic multi-touch control - mono stable output-relay multiple points NO-contact 2A 230V~ Dry contact - controlled by touching the frontal area of the finishing plate or from multiple points with NO push buttons - mono stable, bi stable or timed operating modalities, curtains with interlock with low consumption for identification in the darkness

Home and hotel automation devices with multi-touch configurable commands to control lighting, shutter and recall scenarios. Visual and acoustic feedback command and viewing the status of the actuator: Light on / off, Shutter Open/ Close/ Move, etc. It is possible to select the sensitivity of a device at the touch of the plate or, 4mm distance from it. Powered by home automation power supply.



444KNXT2B
 Toggle control device KNX compatible with 2 channels - toggle white colour
 - supplied with no. 1 plastic white ring - 1 module

444KNXT2B



444KNXT2CR
 Toggle control device KNX compatible with 2 channels - toggle white chrome
 - supplied with no. 1 plastic chrome ring - 1 module

444KNXT2CR





444KNXT2OT
 Toggle control device KNX compatible with 2 channels - brass toggle - supplied with
 no. 1 brass ring - 1 module

444KNXT2OT

Functions

| | Switch | Dimmer | Scene | Shutter and Blinds | Send Value | Control Value | Multi-action (3+3 LongP.) |
|----------|--------|-------------------|------------|--------------------|---------------------------|----------------|---------------------------|
| Commands | On/Off | Increase/Decrease | 1 - 64 | Up + Stop | Send Value n.1 | Unforced + Off | On/Off |
| | On | Increase | Save Scene | Down + Stop | Send Value n.2 | Unforced + On | Up/Down |
| | Off | Decrease | | Up/Down + Stop | Send Value n.3 | Forced + Off | Scene |
| | | | | Up | Send Value n.4 | Forced + On | Send Value (0-255) |
| | | | | Down | Send Value n.1 (long. P.) | | Send Value (0-100%) |
| | | | | Up/Down | Send Value n.2 (long. P.) | | HVAC |
| | | | | Stop | Send Value n.3 (long. P.) | | |
| | | | | Open/Closed Slats | Send Value n.4 (long. P.) | | |
| | | | | Open Slats | | | |
| | | | | Closed Slats | | | |

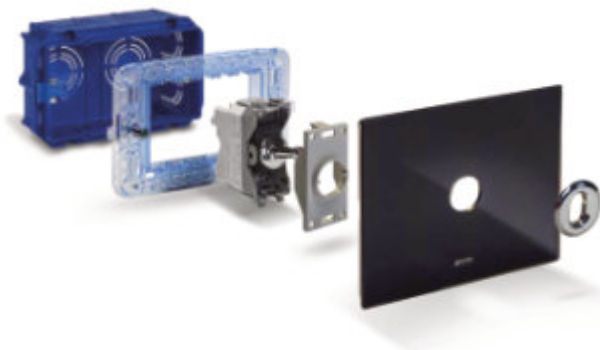




44PVNT21-NAL



To be used with
MOUNTING FRAME

44A02




44PVNT22NAL



To be used with
MOUNTING FRAME

44A02




44PVN01-BL



To be used with
MOUNTING FRAME

44A03




44PVN02-BL



To be used with
MOUNTING FRAME

44A03




44PVN03-NAL



To be used with
MOUNTING FRAME

44A03



44PVN04-BL



To be used with
MOUNTING FRAME

44A04