

hedion



HEDION is a spotlight for special tasks. Small but effective, inconspicuous but functional. This recessed luminaire is designed so as to illuminate a part of a room or create a light island effect without interfering with the architecture of the interior. Interestingly, there is also an IP65 waterproof version, so it can be successfully used even as a shower light. The collection includes two mounting versions of Hedion – with a delicate frame surrounding the mounting hole or a minimalist spotlight without the frame. Thanks to its transparent casing, Hedion can be successfully used both in modern and classical interiors, blending well with any, even stylised, lighting.

Hedion offers minimalistic form and light output range from 350lm to 2050lm in the most popular 2700K/3000K/4000K colour temperature gamut. Despite its high luminous power, the spotlight does not dazzle thanks to its retracted optics. In addition, Hedion offers a smooth DALI2 dimming function, which allows the light intensity to be adjusted to ambient conditions and the time of day.

Hedion is made of high-quality powder coated aluminium available in two colours: white and black. The main body is fixed on a mounting ring, which enables quick and easy installation of the light module without tools.



hedion pro 16



hedion pro 38 trim



hedion pro 60 trim



hedion pro 80



| Model | | On—Off | Switch Dim | DALI2 | PhaseOut | Accessories | Black | White | Mixed | CR88-2700K | CR88-3000K | CR88-4000K | Spot 17° | Medium 34° | Wide 56° | Spot 15° | Medium 38° | Wide 56° | |
|---------------------------|------------------|----------------------|------------|--------|----------|-------------|-------|-------|-------|------------|------------|------------|----------|------------|----------|----------|------------|----------|---|
| | | | | | | | .02 | .03 | .99 | .927 | .930 | .940 | .S | .M | .W | .S | .M | .W | |
| Hedion Pro 16 | | | | | | | | | | | | | | | | | | | |
| 1 | 16LED* | 1x7.6W350lm, 38, 44° | 4.3250 | 4.3251 | 4.3252 | 4.3253 | 1 | • | | | • | • | | | | | | | |
| 2 | 16 Mounting ring | [required] | | | | 4.3254 | | • | • | • | | | | | | | | | |
| Hedion Pro 38 | | | | | | | | | | | | | | | | | | | |
| 1 | 38 LC LED* | 1x8.5W500lm, 36° | 4.3255 | | | | 1 | • | • | • | • | • | | | | | | | |
| 1 | 38 HC LED** | 1x8.5W500lm, 36° | 4.3318 | 4.3256 | 4.3257 | 4.3258 | 1 | • | • | • | • | • | | | | | | | |
| 2 | 38 Mounting ring | [required] | | | | 4.3259 | | • | • | • | | | | | | | | | |
| Hedion Pro 60 | | | | | | | | | | | | | | | | | | | |
| 1 | 60 GU10 | 1x50WGU10 QPAR16 | 4.3260 | | | | 1 | • | • | • | | | | | | | | | |
| 2 | 60 LED | 1x11W800lm | 4.3262 | 4.3263 | 4.3264 | 4.3265 | 1 | • | • | • | • | • | • | • | • | • | • | • | • |
| 3 | 60 Mounting ring | [required] | | | | 4.3266 | | • | • | • | | | | | | | | | |
| Hedion Pro 80 | | | | | | | | | | | | | | | | | | | |
| 1 | 80 LED | 1x15W1100lm | 4.3267 | 4.3268 | 4.3269 | 4.3270 | 1 | • | • | • | • | • | | | | • | • | • | |
| 2 | 80 LED | 1x27W2050lm | 4.3271 | 4.3272 | 4.3273 | 4.3274 | 1 | • | • | • | • | • | | | | • | • | • | |
| 3 | 80 Mounting ring | [required] | | | | 4.3275 | | • | • | • | | | | | | | | | |
| Hedion Pro Trim 16 | | | | | | | | | | | | | | | | | | | |
| 1 | 16LED* | 1x7.6W350lm, 44° | 4.3276 | 4.3277 | 4.3278 | 4.3279 | | • | • | • | • | • | | | | | | | |
| Hedion Pro Trim 38 | | | | | | | | | | | | | | | | | | | |
| 1 | 38 LC LED* | 1x8.5W500lm, 36° | 4.3280 | | | | | • | • | • | • | • | | | | | | | |
| 1 | 38 HC LED** | 1x8.5W500lm, 36° | 4.3319 | 4.3281 | 4.3282 | 4.3283 | | • | • | • | • | • | | | | | | | |
| Hedion Pro Trim 60 | | | | | | | | | | | | | | | | | | | |
| 1 | 60 GU10 | 1x50WGU10 QPAR16 | 4.3284 | | | | | • | • | • | | | | | | | | | |
| 2 | 60 LED | 1x11W800lm | 4.3286 | 4.3287 | 4.3288 | 4.3289 | | • | • | • | • | • | • | • | • | • | • | • | • |
| Hedion Pro Trim 80 | | | | | | | | | | | | | | | | | | | |
| 1 | 80 LED | 1x15W1100lm | 4.3290 | 4.3291 | 4.3292 | 4.3293 | | • | • | • | • | • | | | | • | • | • | |
| 2 | 80 LED | 1x27W2050lm | 4.3294 | 4.3295 | 4.3296 | 4.3297 | | • | • | • | • | • | | | | • | • | • | |

• CR190

* drivers **do not** passthrough the mounting hole


** On—Off driver **passthrough** the mounting hole

• Black Anode


• interior Black Anode + frame color to choose

energy
pg. 17


Hedion Pro

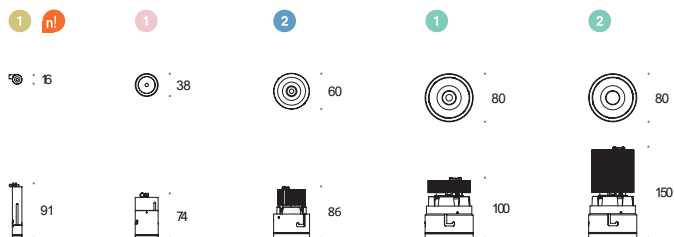

Hedion Pro—mounting rings

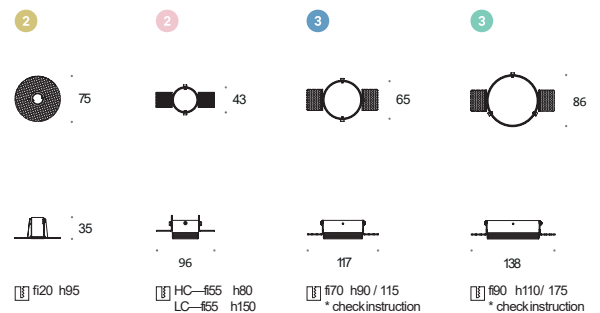

Hedion Pro Trim

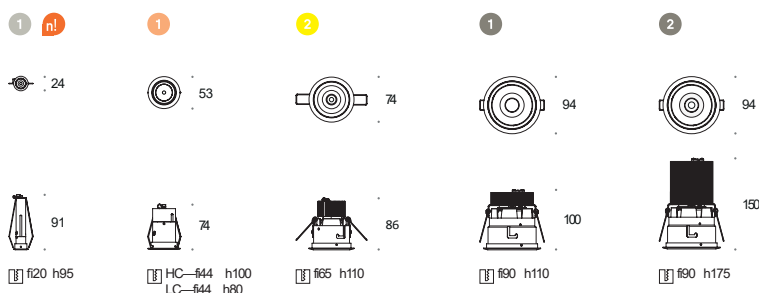




| Model | | On-Off | Switch Dim | DALI2 | PhaseCut | Accessories | Black | White | Mixed | CR198-2700K | CR198-3000K | CR198-4000K | Spot 13° | Medium 32° | Wide 48° | Spot 18° | Medium 35° | Wide 55° | |
|-----------------------|-------------------|----------------|------------|--------|----------|-------------|-------|-------|-------|-------------|-------------|-------------|----------|------------|----------|----------|------------|----------|--|
| | | | | | | | .02 | .03 | .99 | .927 | .930 | .940 | .S | .M | .W | .S | .M | .W | |
| Hedion 115 | | | | | | | | | | | | | | | | | | | |
| 1 | 115 QR111* | 1x50WQR-LP 111 | 4.2637 | | | | • | • | • | | | | | | | | | | |
| 2 | 115edgeLED | 1x8W510lm | 4.2638 | 4.2551 | 4.2640 | 4.2639 | • | • | • | • | • | • | • | • | • | | | | |
| 3 | 115edgeLED | 1x15W1200lm | 4.2642 | 4.2552 | 4.2644 | 4.2643 | • | • | • | • | • | • | | | | • | • | • | |
| 4 | 115edgeLED | 1x27W2000lm | 4.2646 | 4.2553 | 4.2648 | 4.2647 | • | • | • | • | • | • | | | | • | • | • | |
| 5 | 115 Mounting ring | [required] | | | | 4.2636 | • | • | • | | | | | | | | | | |
| Hedion Trim115 | | | | | | | | | | | | | | | | | | | |
| 1 | 115 QR111* | 1x50WQR-LP 111 | 4.2650 | | | | • | • | • | | | | | | | | | | |
| 2 | 115edgeLED | 1x8W510lm | 4.2651 | 4.2554 | 4.2653 | 4.2652 | • | • | • | • | • | • | • | • | • | | | | |
| 3 | 115edgeLED | 1x15W1200lm | 4.2655 | 4.2555 | 4.2657 | 4.2656 | • | • | • | • | • | • | | | | • | • | • | |
| 4 | 115edgeLED | 1x27W2000lm | 4.2659 | 4.2556 | 4.2661 | 4.2660 | • | • | • | • | • | • | | | | • | • | • | |


* 12V—transformer not included



Hedion 115

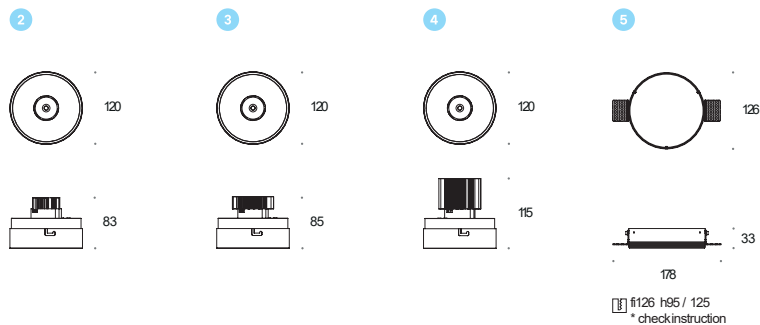


Hedion Trim 115

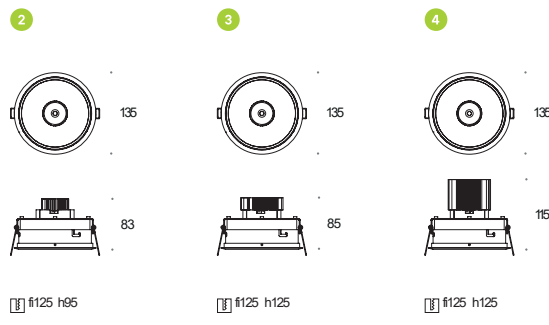

| Model | | On-Off | Switch Dim | DALI2 | PhaseCut | Accessories | Black | White | Mixed | CR198-2700K | CR198-3000K | CR198-4000K | Spot 18° | Medium 35° | Wide 55° |
|---------------------------|------------------|------------|------------|--------|----------|-------------|-------|-------|-------|-------------|-------------|-------------|----------|------------|----------|
| | | | | | | | .02 | .03 | .99 | .927 | .930 | .940 | .S | .M | .W |
| Hedion60 IP65 | | | | | | | | | | | | | | | |
| 1 | 60 LED IP65 | 1x10W750lm | 4.2512 | 4.2514 | 4.2513 | 4.2515 | • | • | • | • | • | • | • | • | • |
| 2 | 60 Mounting ring | [required] | | | | 9.1764 | • | • | • | | | | | | |
| Hedion Trim60 IP65 | | | | | | | | | | | | | | | |
| 1 | 60 LED IP65 | 1x10W750lm | 4.2517 | 4.2519 | 4.2518 | 4.2520 | • | • | • | • | • | • | • | • | • |

Hedion IP65 (waterproof)

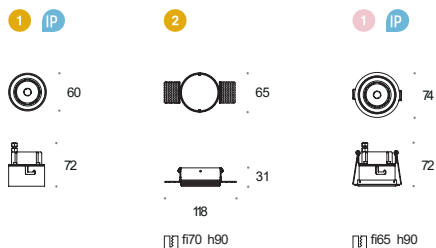

subject to change

