

multiva evo

The MULTIVA family includes a wide range of recessed luminaires, which can also be finished with a subtle mounting frame (12mm wide), masking the rim of the recess. The construction of the lamps is based on a square or a rectangle (one or two sources of light). Multiva does not require much installation space, which is important in case of low rooms. When configuring your own Multiva model, you can choose the colour of the luminaire, its size (60/80/115) or the option of mounting it with an external frame. Multiva also offers a choice of the type of light source, its power and colour. An additional advantage of the Multiva range of products is that they feature optional DALI2 and SwitchDIM modules for dimming and lighting control.









multiva evo 115x1trimless/ multiva evo 80 trimless



multiva evo 80x2 / multiva evo 115x1

OFFA Studio Mikołaj Bejnarowicz

fol. Kizysztof Zgola


light thinking




Model		On-Off	Switch Dim	DALI2	PhaseOut	Accessories	Black	White	Mixed	CR88-2700K	CR88-3000K	CR88-4000K	Spot 13°	Medium 32°	Wide 48°	Spot 10°	Medium 17°	Wide 41°	
										.927	.930	.940	.S	.M	.W	.S	.M	.W	
Multiva Evo60 —80																			
1	60.1LED	1x8W510lm	4.1841	4.3298	4.1842	4.1843				
2	60.2 LED	2x 8W510lm	4.1844	4.3299	4.1845	4.1846				
3	80.1LED	1x 15W1200lm	4.1835	4.3300	4.1836	4.1837	
4	80.2 LED	2x 15W1200lm	4.1838	4.3301	4.1839	4.1840	
Multiva Evo60 —80 Trimless																			
1	Wkad 60.1LED	1x8W510lm	4.1850	4.3308	4.1851	4.1852	1				
2	Wkad 60.2 LED	2x 8W510lm	4.1854	4.3309	4.1855	4.1856	1				
3	60.1Mounting Frame	[required]					4.1849	.	.	.									
4	60.2 Mounting Frame	[required]					4.1853	.	.	.									
5	Wkad 80.1LED	1x 15W1200lm	4.1860	4.3310	4.1861	4.1862	1	
6	Wkad 80.2 LED	2x 15W1200lm	4.1864	4.3311	4.1865	4.1866	1	
7	80.1Mounting Frame	[required]					4.1859	.	.	.									
8	80.2 Mounting Frame	[required]					4.1863	.	.	.									




Multiva Evo60




Multiva Evo 80

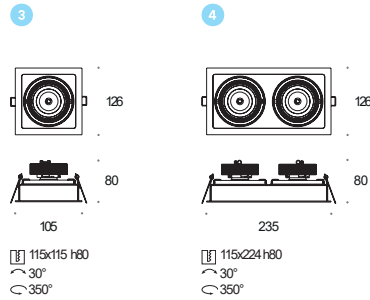


Multiva Evo 60 Trimless



Multiva Evo 80 Trimless



Multiva60 / 80 —mounting frames

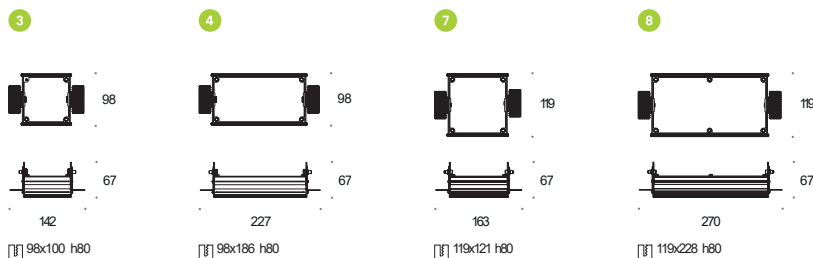


Model		On-Off	Switch Dim	DALI2	PhaseOut	Accessories	Black + White	Black	White	Mixed	CR88-2700K	CR88-3000K	CR88-4000K	Spot 13°	Medium 32°	Wide 48°	Spot 18°	Medium 35°	Wide 55°	
							.44	.02	.03	.99	.927	.930	.940	.S	.M	.W	.S	.M	.W	
Multiva Evo 115 ◆																				
1	12V 115.1QR111*	1x G53 QR-LP 111	4.1821				•	•	•	•										
2	12V 115.2 QR111*	2x G53 QR-LP 111	4.1828				•	•	•	•										
3	115.1LED	1x 8W/510lm	4.1822	4.3302	4.1823	4.1824	•	•	•	•	•	•	•	•	•	•	•	•	•	•
4	115.2LED	2x 8W/510lm	4.1829	4.3303	4.1830	4.1831	•	•	•	•	•	•	•	•	•	•	•	•	•	•
5	115.1LED	1x 15W/1200lm	4.1825	4.3304	4.1826	4.1827	•	•	•	•	•	•	•				•	•	•	•
6	115.2LED	2x 15W/1200lm	4.1832	4.3305	4.1833	4.1834	•	•	•	•	•	•	•				•	•	•	•
7	115.1LED	1x 27W/2000lm	4.2540	4.3306	4.2541	4.2542	•	•	•	•	•	•	•				•	•	•	•
8	115.2LED	2x 27W/2000lm	4.2544	4.3307	4.2545	4.2546	•	•	•	•	•	•	•				•	•	•	•
Multiva Evo Trimless 115 ◆																				
1	12V Inset 115.1QR111*	1x G53 QR-LP 111	4.1806				①	•	•	•										
2	12V Inset 115.2QR111*	2x G53 QR-LP 111	4.1814				①	•	•	•										
3	Inset 115.1LED	1x 8W/510lm	4.1807	4.3312	4.1808	4.1809	①	•	•	•	•	•	•	•	•	•	•	•	•	•
4	Inset 115.2LED	2x 8W/510lm	4.1815	4.3313	4.1816	4.1817	①	•	•	•	•	•	•	•	•	•	•	•	•	•
5	Inset 115.1LED	1x 15W/1200lm	4.1810	4.3314	4.1811	4.1812	①	•	•	•	•	•	•				•	•	•	•
6	Inset 115.2LED	2x 15W/1200lm	4.1818	4.3315	4.1819	4.1820	①	•	•	•	•	•	•				•	•	•	•
7	Inset 115.1LED	1x 27W/2000lm	4.1948	4.3316	4.1949	4.1950	①	•	•	•	•	•	•				•	•	•	•
8	Inset 115.2LED	2x 27W/2000lm	4.1952	4.3317	4.1953	4.1954	①	•	•	•	•	•	•				•	•	•	•
9	115.1 Mounting Frame	[required]						•	•	•										
10	115.2 Mounting Frame	[required]						•	•	•										


* 12V—transformer not included




Multiva Evo 115

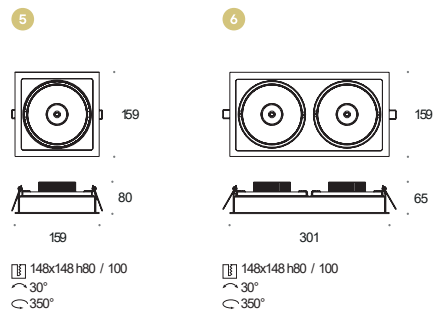

Multiva Evo 115 Trimless

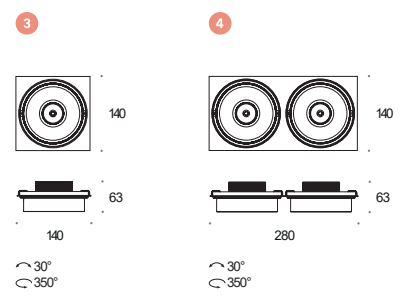

Multiva Evo 115 Trimless—mounting frames

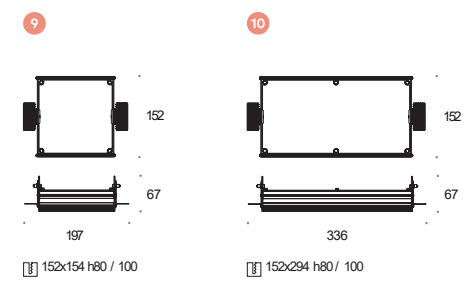

subject to change

