Design Studio Yuriy Zimenko

fot. Andrey Avdeenko

panton

panton

new version

IP 54/65

Panton represents a family of sealed lumina-ires dedicated to special zones exposed to moisture and steam. The lamps are offered in two tightness classes: IP54 (for use in in-creased humidity zones) and IP65 (suitable for use even in the shower cabins). Panton 1.0 was designed to be mounted in a low room – you can choose between a sleek 38mm surface-mounted luminaire (which requires the power supply to be placed above the ceiling) and a recessed one. All models are equipped with an integrated LED light source and are available in white, black, and mixed colour versions.
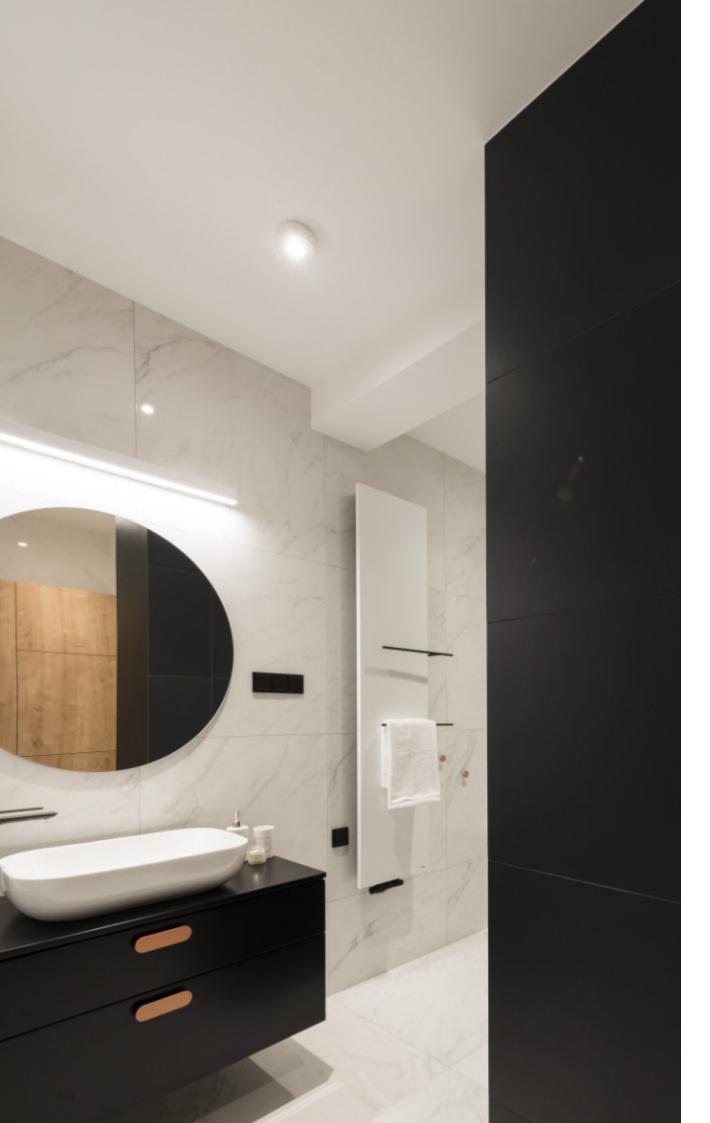
panton 2.0 NT / panton 1.0 NT / panton tube

panton 1.0 WP / panton 2.0 WP

Model		On—Off	White + Black .33	Black + White .44	Black .02	White .03	Mixed .99	CRI98 2700K .927	CRI98 3000K .930	CRI98 4000K .940
Panton LV 1.0										
① 1.0 NT	| 1x 7.6W 500lm **IP54**	3.2493	•	•	•	•	•	•	•	•
② 1.0 WP	| 1x 7.6W 500lm **IP54**	4.2494			•	•	•	•	•	•
Panton LV 2.0										
① 2.0 NT	| 1x 9.7W 760lm **IP65**	3.2495	•	•	•	•	•	•	•	•
② 2.0 WP	| 1x 9.7W 760lm **IP65**	4.2496			•	•	•	•	•	•
Panton LV Tube										
① Tube NT	| 1x 9.7W 880lm **IP65**	3.2497	•	•	•	•	•	•	•	•

energy
pg/str.17

Panton 1.0 LV

① n!

85
21
check instruction!

② n!

79
45
fi72 h60

Panton 2.0 LV

① n!

130
50

② n!

130
50
fi100 h80

Panton Tube LV

① n!

75
90

details subject to change.

LABRA

FW LIGHTING